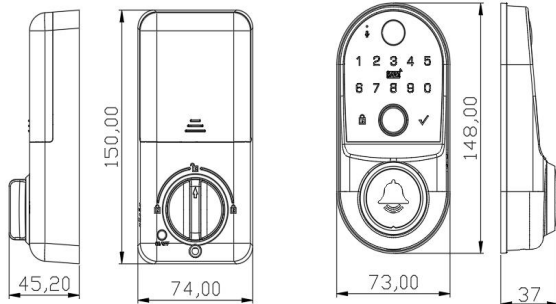


K18 Locking Product Parameters

Picture	Product model	Function parameters	Material color	Product weight	Packaging specifications	Standard configuration
	K18 Doodle WiFi version	Fingerprint sensor type: Semiconductor biometric fingerprint Fingerprint sensor type: Semiconductor biometric fingerprint Fingerprint pixels: 160*160 Fingerprint image resolution: 508 DPI Fingerprint recognition time: <1.5 seconds Operating temperature: -20°C to 60°C Operating voltage range: 7 - 8.4V Low voltage warning: 7.2V False recognition rate (FAR): <0.001% False rejection rate (FRR): <1.0% Password length: 6 - 0 characters Parameters: Fingerprint users <= 100, Password users <= 100, Card users <= 100 Unlocking functions: Fingerprint, password, card, key, WiFi remote unlocking Product functions: Anti-spy password, temporary password, one-time password, silent mode, always-on mode, low battery reminder, connect to Google speaker and Amazon speaker, APP management to view unlocking records, one-click lock, automatic lock (can be set (1-99 seconds), error code input limit (after 10 failed attempts of entering valid PIN code, the device will be shut down for 3 minutes)) Video intercom: Built-in high-definition camera and doorbell, supports real-time video calls Remote monitoring: Can remotely view the outside situation of the door lock at any time Power supply method: The front panel has a Type-C emergency power interface, and the rear panel has a rechargeable lithium battery (double battery 2500mAh) Charger adapter: Output 5V/2A	Material: Aluminum alloy Color: Yahai Nickel polishing	1. With Screen: (1) Single unit: Gross weight approximately 1446.15 grams (2) Full carton (12 pieces) Gross weight is approximately 18.5 kilograms Without screen: (1) Single set: Gross weight is approximately 1257.65 grams (2) Full carton (12 pieces) Approximately 16.25 kilograms	1. With Screen: (1) Single unit: Gross weight approximately 1446.15 grams Inner box 18. 9*16. 8*13CM Outer box 52*39*28CM	Lock cylinder: Full copper lock cylinder (2 keys) Lock body:
Product design and testing standards		Production aging time		24-hour (Full Inspection)		
		Standby current		<150MA (Full Inspection)		
		Working current		<350mA (Full Inspection) Full inspection		
		Fingerprint touch recognition		Full inspection		
		Motor clutch life		More than 50,000 normal opening and closing operations (batch inspection)		
		Motor clutch operation		Normal operation (full inspection)		
		High/low temperature test		Batch inspection		
		Static electricity test		Batch inspection		
		Salt spray test		Batch inspection		
		Battery box		Normal power-on (full inspection)		
		Product appearance		No large-area defects		
Product dimensions diagram				Product application scope		
				 Applicable door thickness: 34 - 54 mm		
Product packaging (The inner box can be customized according to your requirements)			Accessory diagram			
						